



# WASHING

## NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-11/14 TP2



### CHARACTERISTICS

#### TP2

- User friendly and totally programmable 7".
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.).
- 37 languages.
- 8 dosing signals as standard 8 dosing.

#### G FACTOR

- High G-Factor of 200.

#### EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

#### VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

#### CONNECTIVITY

- IoT - FagorKonnnect.
- Remote technical service.
- Management of laundries: OPL and selfservice.
- Remote payment.

#### ERGONOMICS

- Biggest door diameters: Ø373.
- Easy opening/closing system for door lock.

#### MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

#### OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

### OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- External double drain 3".
- Normally closed valve.
- Water FULL FLOW: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.

		U.	LN-11 TP2	LN-14 TP2		
<b>DRUM</b>						
Load capacity 1:9 / 1:10		Kg	11/10	14/13		
Volume		l	100	130		
Diameter		mm	620	620		
Depth		mm	330	430		
<b>GENERAL DETAILS</b>						
Washing speed/ Spinning speed		r.p.m.	53/759	53/759		
Factor G		-	200	200		
Maximum force transmitted		KN	2,0 ±3	2,31 ±4		
Frequency-dynamic force		Hz	8,93	8,93		
Noise level		dB	<70	<70		
Coin laundry version		-	Yes	Yes		
Double drain		-	No	Opt.		
Weighing system / Tilting system		-	No	No		
SLUICE option		-	Yes	Yes		
<b>DOOR</b>						
Height center door/ Height door		mm	570/310	570/310		
Diameter		mm	373	373		
<b>POWER</b>						
Motor		kW	1,1	1,1		
Electric heating power		kW	6	9		
Total electric power (electric model)		kW	6,25	9,5		
Total electric power (hw, steammodel)		kW	1,1	1,1		
<b>CONNECTIONS</b>			<b>ELECTRICAL</b>	<b>STEAM/HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM/HOT WATER</b>
Tensión 230V- I + N + T	Nº x mm2 / A		2x6+T / 40A	2x1,5+T / 16A	2x10+T / 50A	2x1,5+T / 16A
Tensión 230V- III + T	Nº x mm2 / A		3x2,5+T / 20A	-	3x4+T / 32A	-
Tensión 400V- III + N + T	Nº x mm2 / A		4x1,5+T / 16A	-	4x1,5+T / 16A	-
Steam inlet (Steam model)	inch		1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h		7		8,5	
Water inlet	inch		3/4"		3/4"	
Water main pressure	Kg/cm <sup>2</sup>		2-4		2-4	
Maximum water consumption	Lit/h		61,5*		78,8*	
Drain	mm/inch		3"		3"	
Drainage capacity	Lit/min		200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>						
Net Width / Gross Width		mm	719/782		719/782	
Net Depth / Gross Depth		mm	755/890		856/990	
Net Height / Gross Height		mm	1.165/1.400		1.165/1.400	
Net weight / Gross weight		Kg	198/231,6		210/245	
Volume		m <sup>3</sup>	0,97		1,08	

\* Programme No. 20, 75% load

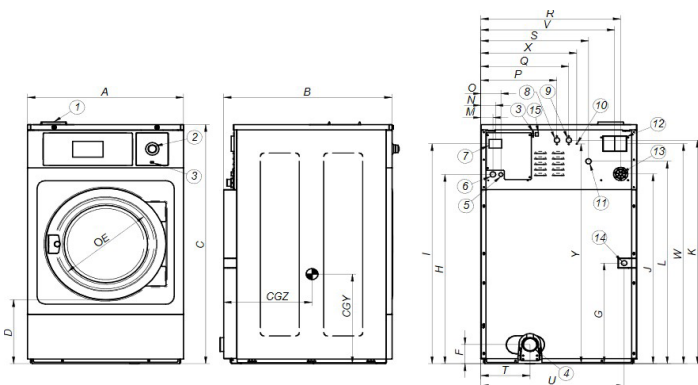

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-11	mm	719	755	1.165	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	383	511
LN-14	mm	719	856	1.165	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	484	524



# WASHING

## NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-18/22 TP2



### CHARACTERISTICS

#### TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages.
- 8 dosing signals as standard.

#### G FACTOR

- G-FACTOR 200.

#### EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

#### VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

#### CONNECTIVITY

- IoT - FagorKonnnect.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

#### ERGONOMICS

- Biggest door diameters: Ø460.
- Easy opening/closing system for door lock.

#### MAINTENANCE

- Hinged panel: easy access to parts.
- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

#### OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

### OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water RE-CYCLE: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.

	U.	LN-18 TP2	LN-22 TP2		
<b>DRUM</b>					
Load capacity 1:9 / 1:10	Kg	20/18	25/22		
Volume	l	180	220		
Diameter	mm	700	700		
Depth	mm	470	560		
<b>GENERAL DETAILS</b>					
Washing speed / Spining speed	r.p.m.	50/714	50/714		
G Factor	-	200	200		
Maximum force transmitted	KN	2,63 ±5	3,04 ±5		
Frequency-dynamic force	Hz	8,42	8,42		
Noise level	dB	<70	<70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing System / Tilting System	-	No	No		
Option SLUICE	-	Yes	Yes		
<b>DOOR</b>					
Height center door / Height door	mm	655/348	655/348		
Diameter	mm	460	460		
<b>POWER</b>					
Motor	kW	2,2	2,2		
Electric heating power	kW	12	12		
Total electric power (electric model)	kW	12,75	12,75		
Total electric power (hw, steam model)	kW	2,2	2,2		
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>STEAM/HOT WATER</b>	<b>ELECTRIC</b>	<b>STEAM/HOT WATER</b>
Tension 230V - I + N + T	N° x mm2 / A	2x16+T / 63A	2x1,5+T / 16A	2x16+T / 63A	2x1,5+T / 16A
Tension 230V - III + T	N° x mm2 / A	3x6+T / 40A	-	3x6+T / 40A	-
Tension 400V - III + N + T	N° x mm2 / A	4x4+T / 32A	-	4x4+T / 32A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	12		12	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm <sup>2</sup>	2-4		2-4	
Maximum water consumption	Lit/h	120*		120*	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	mm	788/850		788/850	
Net Depth / Gross Depth	mm	935/1.013		1.035/1.106	
Net Height / Gross Height	mm	1.307/1.583		1.307/1.583	
Net weight / Gross weight	Kg	272/309		295/335	
Volume	m <sup>3</sup>	1,36		1,5	

\* Programme No. 20, 75% load

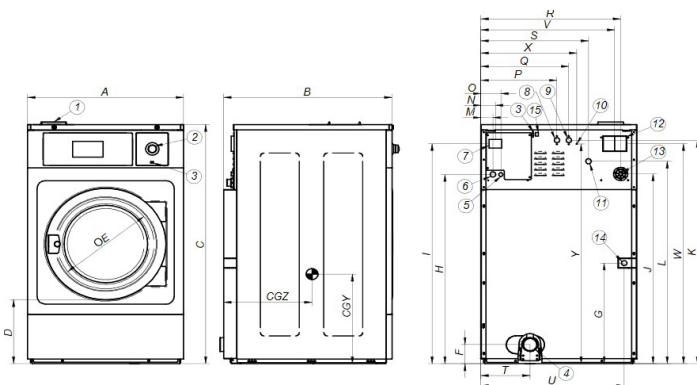

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LN-18	mm	788	935	1.307	348	460	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	546
LN-22	mm	788	1.035	1.307	348	460	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	586



# WASHING

## NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-28 TP2

### CHARACTERISTICS

#### TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard.

#### G FACTOR

- G-FACTOR 200.

#### EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

#### VERSATILITY

- Make to order: customisation .
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

#### CONNECTIVITY

- IoT - FagorKconnect.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

#### ERGONOMICS

- Biggest door diameters: Ø460.
- Easy opening/closing system for door lock.

#### MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

#### OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.


#### OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water RE-CYCLE: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.



		U.	LN-28 TP2
<b>DRUM</b>			
Load capacity 1:9 / 1:10		Kg	31/28
Volume		l	280
Diameter		mm	770
Depth		mm	585
<b>GENERAL DETAILS</b>			
Washing speed / Spining speed		r.p.m.	48/682
G Factor		-	200
Maximum force transmitted		KN	3,68 ± 6
Frequency-dynamic force		Hz	8,02
Noise level		dB	<70
Coin laundry version		-	Yes
Double drain		-	Opt.
Weighing System / Tilting System		-	No
SLUIICE option		-	Yes
<b>DOOR</b>			
Height center door / Height door		mm	700/400
Diameter		mm	460
<b>POWER</b>			
Motor		kW	4
Electric heating power		kW	18
Total electric power (electric model)		kW	19,2
Total electric power (hw, steam model)		kW	4
<b>CONNECTIONS</b>			<b>ELECTRIC</b> <b>STEAM / HOT WATER.</b>
Tension 230V - I + N + T	N° x mm2 / A	-	2x4+T / 32A
Tension 230V - III + T	N° x mm2 / A	3x16+T / 63A	3x2,5+T / 20A
Tension 400V - III + N + T	N° x mm2 / A	4x4+T / 32A	4x1,5+T / 16A
Steam inlet (Steam model)	inch	3/4"	
Maximum steam consumption (Steam model)	Kg/h	15	
Water inlet	inch	3/4"	
Water main pressure	Kg/cm <sup>2</sup>	2-4	
Maximum water consumption	Lit/h	164,8*	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>			
Net Width / Gross Width	mm	884/945	
Net Depth / Gross Depth	mm	1.075/1.230	
Net Height / Gross Height	mm	1.340/1.583	
Net weight / Gross weight	Kg	403/431	
Volume	m <sup>3</sup>	1,84	

\* Programme No. 20, 75% load

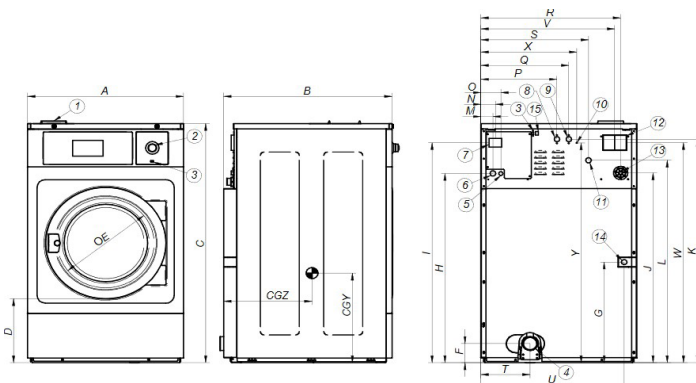

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LN-28	mm	884	1.075	1.340	400	460	145	548	1.063	1.230	1.065	1.250	1.135	61	74	101	430	510	801	640	268	820	772	1.220	570	1.210	591	593



# WASHING

## NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-35C/45C TP2

### CHARACTERISTICS

#### TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions)
- 37 languages
- 8 dosing signals as standard

#### G FACTOR

- G-FACTOR 200.

#### EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

#### VERSATILITY

- Make to order: customisation .
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

#### CONNECTIVITY

- Remote technical service.
- Management of laundries: OPL and selfservice.
- Remote payment.

#### ERGONOMICS

- Biggest door diameters: Ø560 (for LN-35C/45C).
- Easy opening/closing system for door lock.

#### MAINTENANCE

- Hinged panel: easy access to parts.
- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

#### OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.


#### OPTIONS

- Double drain.
- Normally closed valve.
- Silicon gasket (for LN-35).
- WaterFULL FLOW recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Printer.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel outer casing.
- Stainless steel front panel.
- SLUICE: model with 8mm drum holes (for LN-35C/45C).
- Anchoring base.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Delayed door opening in case of power outage.



	U.	LN-35C TP2	LN-45C TP2		
<b>DRUM</b>					
Load capacity 1:9 / 1:10	Kg	39/35	47/42		
Volume	l	350	450		
Diameter	mm	860	860		
Depth	mm	602	720		
<b>GENERAL DETAILS</b>					
Washing speed / Spining speed	r.p.m.	45/644	45/644		
G Factor	-	200	200		
Maximum force transmitted	KN	4,59 ±8	5,9 ±8		
Frequency-dynamic force	Hz	7,58	7,58		
Noise level	dB	<70	<70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing system / Tilting system	-	No	No		
SLUICE Version	-	Yes	Yes		
<b>DOOR</b>					
Height center door / Height door	mm	735/440	735/440		
Diameter	mm	560	560		
<b>POWER</b>					
Motor	kW	4	6		
Electric heating power	kW	21	21		
Total electric power (electric model)	kW	22	22		
Total electric power (hw, steam model)	kW	4	6		
<b>CONNECTIONS</b>					
		<b>ELECTRIC</b>	<b>STEAM/HOT WATER</b>	<b>ELECTRIC</b>	<b>STEAM/HOT WATER</b>
Tension 230V- I + N + T	N° x mm2 / A	-	2x4+T / 32A	-	-
Tension 230V- III + T	N° x mm2 / A	3x16+T/63A	3x2,5+T / 20A	3x16+T / 63A	3x4+T / 32A
Tension 400V- III + N + T	N° x mm2 / A	4 x6+T / 40A	2x1,5+T / 16A	4x6+T / 40A	4x1,5+T / 16A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	18		21	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm <sup>2</sup>	2-4		2-4	
Maximum water consump.	Lit/h	199,6*		256,6*	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	mm	979/1.045		979/1.125	
Net Depth / Gross Depth	mm	1.155/1.280		1.325/1.440	
Net Height / Gross Height	mm	1.411/1.655		1.411/1.640	
Net weight / Gross weight	Kg	476/510		600/670	
Volume	m <sup>3</sup>	2,2		2,6	


\* Programme No. 20, 75% load

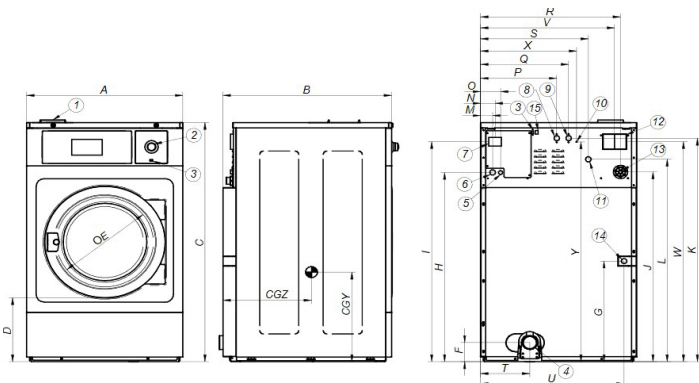

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LN-35C	mm	979	1.155	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	682
LN-45C	mm	979	1.325	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	760





# WASHING

## NORMAL SPIN WASHER EXTRACTORS HIGH CAPACITY LN-60C/80C TP2

### CHARACTERISTICS

#### TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard.

#### G FACTOR

- High G-Factor 150.

#### EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

#### VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- WET CLEANING features as standard.

#### CONNECTIVITY

- IoT - FagorKconnect.
- Remote technical service.
- Management of laundries: OPL.
- Remote payment.

#### ERGONOMICS

- Big door diameters: Ø 560 mm.
- Easy opening/closing system for door lock.

#### MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.diagnosis.

#### OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304.
- 3 water inlets (Water inlet hoses not included).
- CB and WRAS approved product Option ETL.


#### OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water inlet hose.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.
- Stainless steel AISI 304 outer casing.
- Front soap dispenser.



	U.	LN-60C TP2	LN-80C TP2		
<b>DRUM</b>					
Load capacity 1:9 / 1:10	Kg	65/59	85/77		
Volume	l	600	800		
Diameter	mm	1.048	1.048		
Depth	mm	684	936		
<b>GENERAL DETAILS</b>					
Washing speed / Spining speed	r.p.m.	42,5 / 505	42,5 / 505		
G Factor	-	150	150		
Maximum force transmitted	KN	9,12 ± 15	10,17 ± 15		
Frequency-dynamic force	Hz	6,93	6,93		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing system / Tilting system	-	No	No		
SLUICE option		Yes	Yes		
<b>DOOR</b>					
	mm	900 / 540	900 / 540		
	mm	560	560		
Motor	kW	5,5	5,5		
Electric heating power	kW	36	48/36***		
Total electric power (electric model)	kW	38	50,5/38,5***		
Total electric power (hot water, steam)	kW	5,5	7,5		
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>STEAM/HOT WATER</b>	<b>ELECTRIC</b>	<b>STEAM/HOT WATER</b>
Tension 230V - III + T	N° x mm2 / A	3x25+T / 100A	3x4+T / 32A	3x25+T / 100A	3x4+T / 32A
Tension 400V - III + N + T	N° x mm2 / A	4x16+T / 63A	4x1,5+T / 16A	4x25+T / 80A	4x4+T / 20A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Max. steam consumption (Steam model)	Kg/h	21		21	
Water inlet	inch	1"		1"	
Water main pressure	Kg/cm <sup>2</sup>	2-4		2-4	
Maximum water consumption	Lit/h	627,9**		814,5**	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	mm	1.225 / 1.335		1.225 / 1.335	
Net Depth / Gross Depth	mm	1.315 / 1.440		1.492 / 1.660	
Net Height / Gross Height	mm	1.640 / 1.860		1.640 / 1.860	
Net weight / Gross weight	Kg	792 / 878		871 / 963	
Volume	m <sup>3</sup>	3,6		4,12	

\*\* Programme No. 2, 100% load  
 \*\*\*400V=48kW / 230V=36kW version

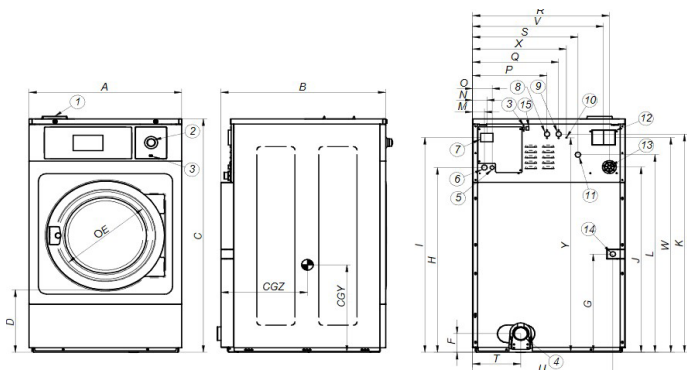

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-60C	1.225	1.315	1.640	540	560	140	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	270	1.163	1.080	1.470	992	1.595	644	972
LN-80C	1.225	1.492	1.640	540	560	140	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	270	1.163	1.080	1.470	992	1.595	644	750